

MMBT3906

PNP General Purpose Amplifier

Features

- Collector current capability $I_C = -200\text{ mA}$
- Collector-emitter voltage $V_{CEO} = -40\text{ V}$
- RoHS compliant package

Application





- General switching and amplification

Mechanical Data

Case outline: SOT23



Packing & Order Information

3,000/Reel

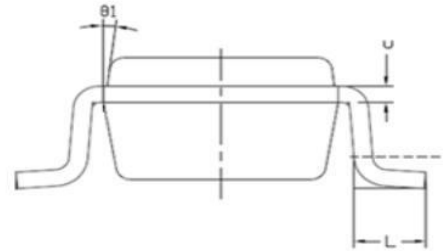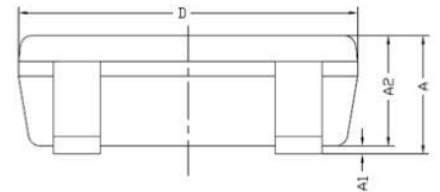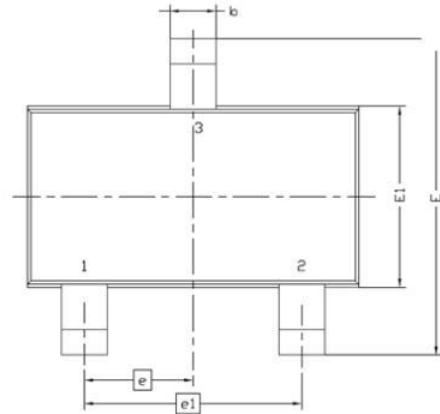

**RoHS
COMPLIANT**

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS

Symbol	Characteristic	Rating	Unit
V_{CBO}	Collector-Base Voltage	-40	Vdc
V_{CEO}	Collector-Emitter Voltage	-40	Vdc
V_{EBO}	Emitter-Base Voltage	-6	Vdc
I_C	Collector Current -Continuous	-200	mAdc

THERMAL CHARACTERISTICS

Symbol	Characteristic	Max	Unit
P_D	Total Device Dissipation	225	mW
	FR-5 Board(1)		
	$T_A=25^\circ\text{C}$	1.8	mW/ $^\circ\text{C}$
	Derate above 25°C		

MMBT3906

PNP General Purpose Amplifier

THERMAL CHARACTERISTICS

Symbol	Characteristic	Rating	Unit
P_D	Total Device Dissipation	300	mW
	Alumina Substrate	2.4	mW/°C
	$T_A=25^\circ\text{C}$		
	Derate above 25°C		
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	417	°C/W
T_J, T_{stg}	Junction and Storage Temperature	150°C, -55 to + 150°C	

DEVICE MARKING

MMBT3906=2A

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

OFF CHARACTERISTICS

Symbol	Characteristic	Min	Max	Unit
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage(3) ($I_C = -1.0\text{mA}$, $I_B = 0$)	-40	--	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C = -10\mu\text{A}$, $I_E = 0$)	-40	--	Vdc
$V_{(BR)CEO}$	Emitter-Base Breakdown Voltage ($I_E = -10\mu\text{A}$, $I_C = 0$)	-6.0	--	Vdc
I_{BEX}	Base Cutoff Current ($V_{CE} = -30\text{Vdc}$, $V_{EB} = -3.0\text{Vdc}$)	--	-50	nAdc
I_{CEX}	Collector Cutoff Current ($V_{CE} = -30\text{Vdc}$, $V_{EB} = -3.0\text{Vdc}$)	--	-50	nAdc

ON CHARACTERISTICS

Symbol	Characteristic	Min	Max	Unit
h_{PE}	DC Current Gain			--
	$I_C = -0.1\text{mA}$, $V_{CE} = -1.0\text{Vdc}$	40	--	
	$I_C = -1.0\text{mA}$, $V_{CE} = -1.0\text{Vdc}$	70	--	
	$I_C = -10\text{mA}$, $V_{CE} = -1.0\text{Vdc}$	100	300	
	$I_C = -50\text{mA}$, $V_{CE} = -1.0\text{Vdc}$	60	--	
	$I_C = -100\text{mA}$, $V_{CE} = -1.0\text{Vdc}$	30	--	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -10\text{mA}$, $V_B = -1.0\text{mA}$)	--	-0.25	Vdc
	($I_C = -50\text{mA}$, $V_B = -5.0\text{mA}$)	--	-0.4	

MMBT3906

PNP General Purpose Amplifier

ON CHARACTERISTICS

Symbol	Characteristic	Min	Max	Unit
$V_{CE(sat)}$	Base-Emitter Saturation Voltage	-0.65	-0.85	Vdc
	($I_C = -10\text{mAdc}$, $V_B = -1.0\text{ mAdc}$)	--	-0.95	
	($I_C = -50\text{mAdc}$, $V_B = -5.0\text{ mAdc}$)			

SMALL-SIGNAL CHARACTERISTICS

Symbol	Characteristic	Min	Max	Unit
f_T	Current-Gain-Bandwidth Product ($I_C = -10\text{mAdc}$, $V_{CE} = -20\text{Vdc}$, $f = 100\text{MHz}$)	300	--	MHZ
C_{obo}	Output Capacitance ($V_{CB} = -5.0\text{Vdc}$, $I_E = 0$, $f = 1.0\text{MHz}$)	--	4.0	pF
C_{ibo}	Input Capacitance ($V_{EB} = -0.5\text{Vdc}$, $I_C=0$, $f = 1.0\text{MHz}$)	--	8.0	pF
H_{ie}	Input Impedance ($V_{CE} = -10\text{Vdc}$, $I_C= -1.0\text{mAdc}$, $f = 1.0\text{KHz}$)	1.0	10	k Ω
H_{re}	Voltage Feedback Ration ($V_{CE} = -10\text{Vdc}$, $I_C= -1.0\text{mAdc}$, $f = 1.0\text{KHz}$)	0.5	8.0	$\times 10^{-4}$
H_{fe}	Small-Signal Current Gain ($V_{CE} = -10\text{Vdc}$, $I_C= -1.0\text{mAdc}$, $f = 1.0\text{KHz}$)	100	400	--
H_{oe}	Output Admittance ($V_{CE} = -10\text{Vdc}$, $I_C= -1.0\text{mAdc}$, $f = 1.0\text{KHz}$)	1.0	40	μmos
NF	Noise Figure ($V_{CE} = -5.0\text{Vdc}$, $I_C = -100\mu\text{Adc}$, $R_S = 1.0\text{k}\Omega$, $f = 1.0\text{KHz}$)	--	5.0	dB


SMALL-SIGNAL CHARACTERISTICS

Symbol	Characteristic	Min	Max	Unit
t_d	Delay Time	--	35	ns
t_r	Rise Time			
t_s	Storage Time	--	225	ns
t_f	Fall Time	--	75	ns

- FR-5=1.0 × 0.75 × 0.062in.
- Alumina=0.4 × 0.3 × 0.024in. 99.5% alumina.
- Pulse Width ≤ 300us, Duty Cycle ≤ 2.0%
- Pulse Test : Pulse Width ≤ 300us ; Duty Cycle 2.0%

MMBT3906

PNP General Purpose Amplifier

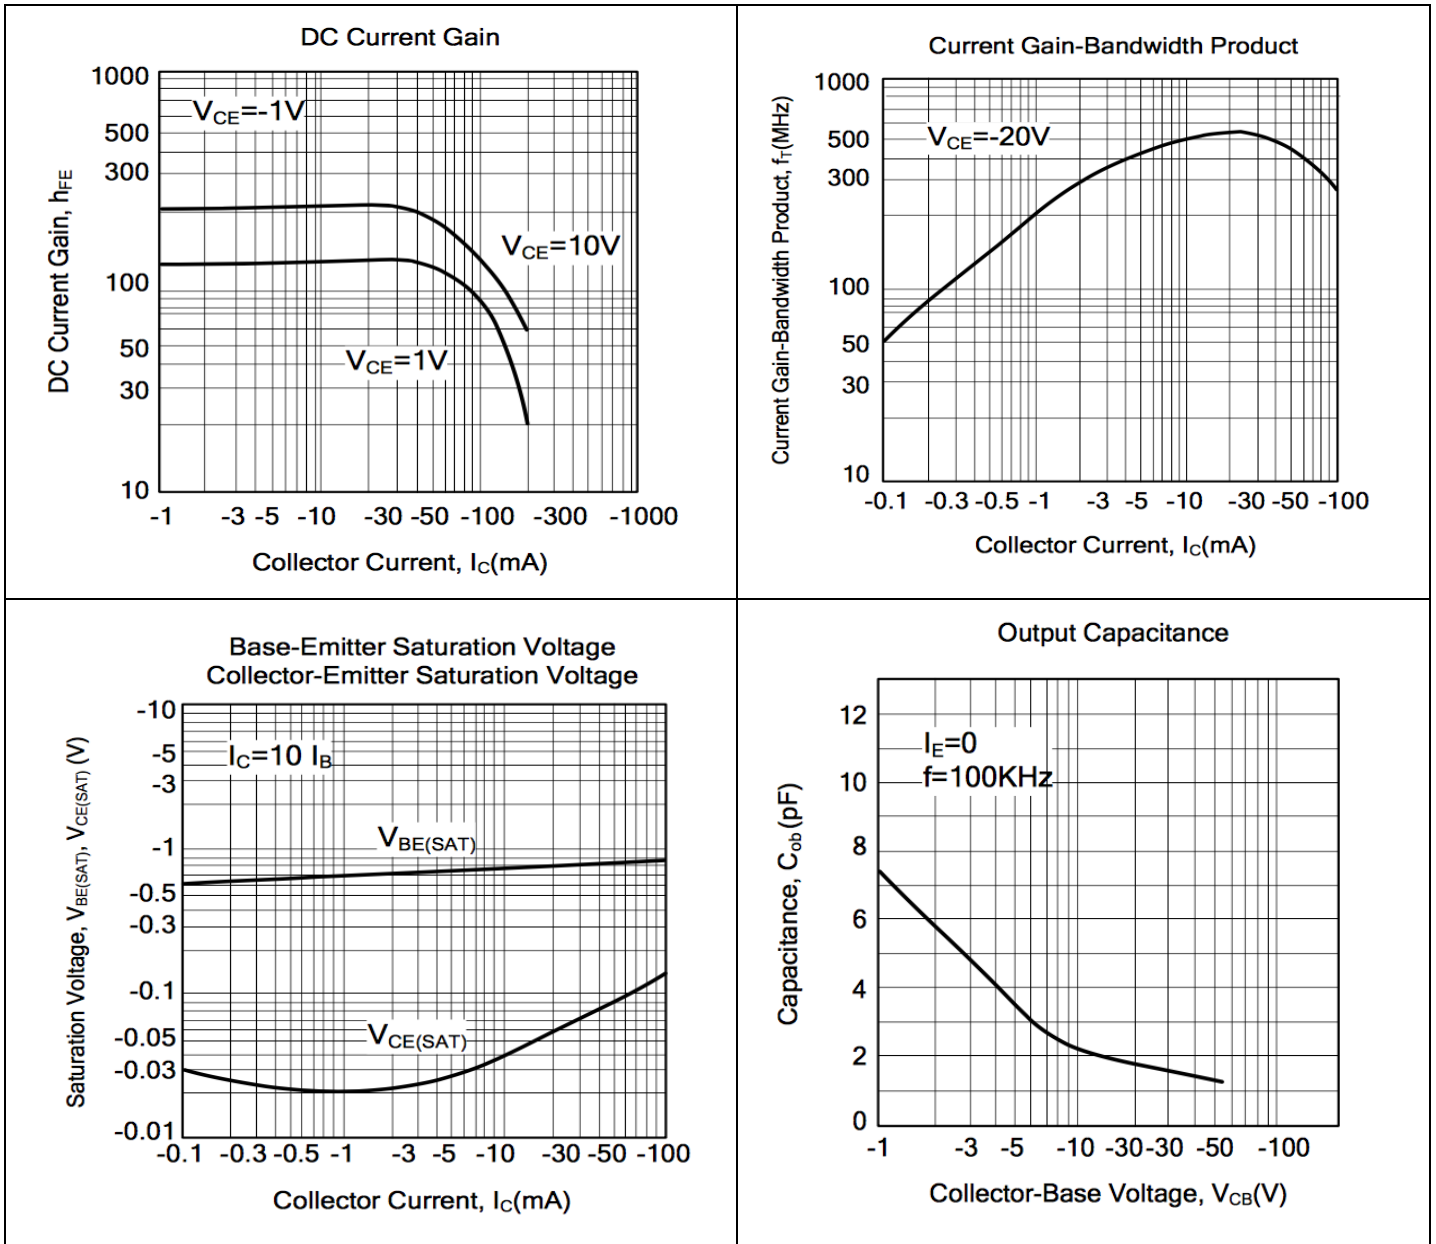

MMBT3906

PNP General Purpose Amplifier

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.